| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | NOTES |
|---|---|---|---|---|
| 1 | 50-00126 | Connector, dc plug, 5.5x2.1xL22.5 mm, brass nickel plated | 1 | |
| 2 | 50-00362 | Connector, dc jack, 5.5x2.1xL20.5 mm, molding style | 1 | |
| 3 | 30-00008 | Wire, 2C BC, 22 AWG, UL2468, 300V, 80C, 3.6 mm, PVC, 87A | 1 | |
| 4 | 24-00042 | Overmold, PVC, black | 1 | |
| 5 | 24-00043 | Overmold, PVC, black | 1 | |

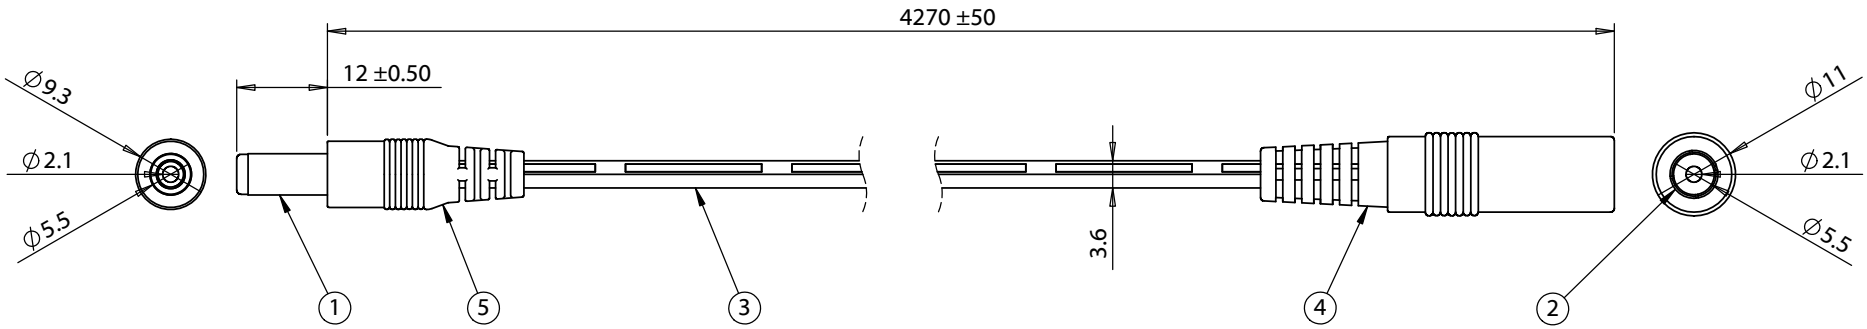


| Wiring Diagram | | |
|---|---|---|
| 50-00126 | wire color | 50-00362 |
| center | black with stripe | center |
| sleeve | black | sleeve |

| Revision: | Date: | Description: |
|---|---|---|
| A | 10/22/2010 | Initial release |
| A1 | 8/7/2014 | Updated drawing and template |
| | | |
| | | |
| | | |

Prepared: GL 2016.03.09 16:08:12 -08'00'

Verified: AG 2016.04.04 14:35:41 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 4270 mm, 5.5x2.1x12 mm dc plug to 5.5x2.1 mm dc jack, 22 AWG, UL2468 30-00008


TENSILITY

*tel* 1.541.323.3228 *800* 877.670.7118
*fax* 1.541.323.4202 *web* tensility.com


Size: A

Part number: 10-00464

Scale: 1:5

Sheet 1 of 1

5 4 3 2 1