



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00400	Connector, stereo plug, 2.5xL19.6 mm, brass, nickel plated, molding style	2	
2	30-00177	Wire, 2C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00085	Overmold, PVC	2	black

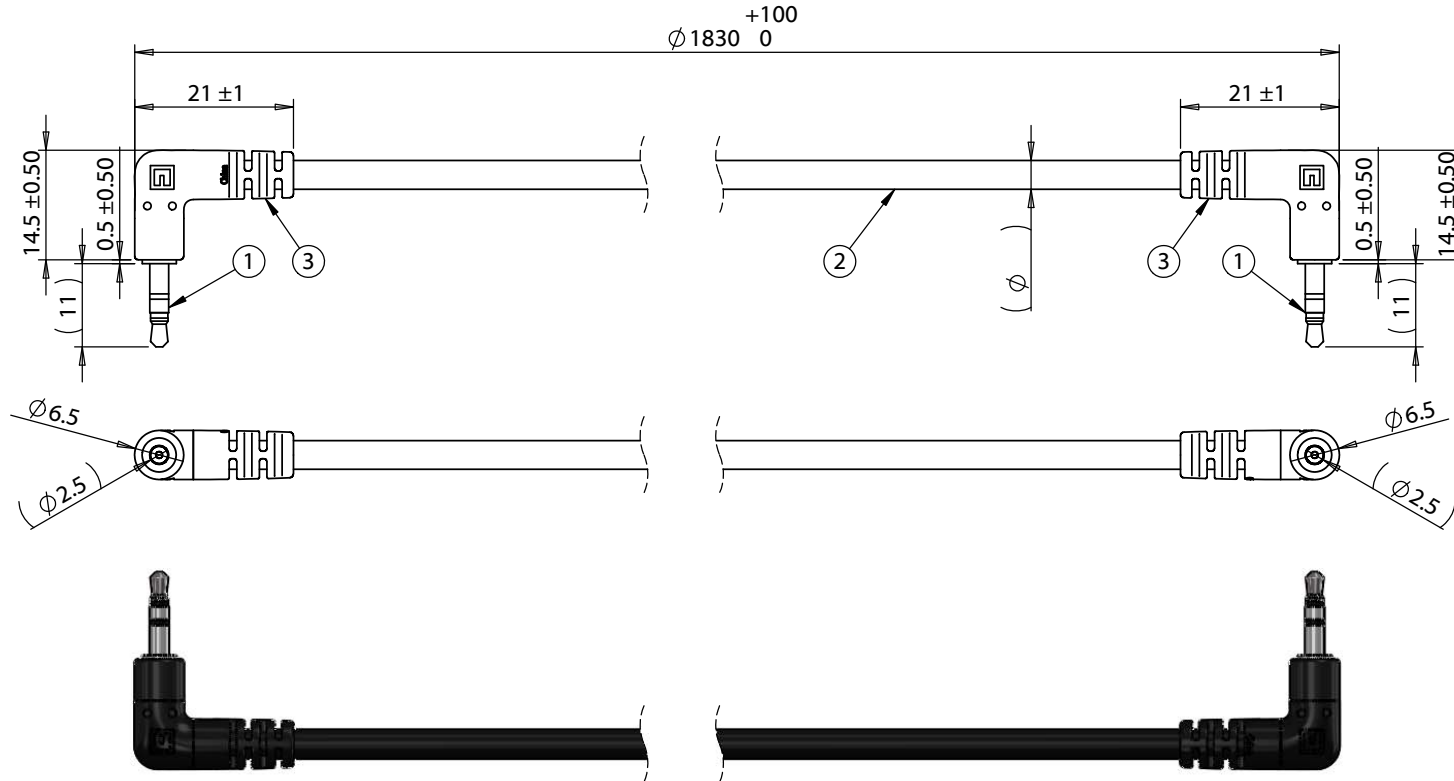

Wiring Diagram		
50-00400	wire color	50-00400
A	red	A
B	white	B
C	shield	C

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared: DN <small>Digitally signed by DN Date: 2017.05.22 08:32:59 -07'00'</small>	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	3/7/2016	Initial release	Verified: GL <small>Digitally signed by GL Date: 2017.05.23 08:14:27 -07'00'</small>	RoHS compliant	
A1	7/12/2016	Modified collar exposure	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
A2	5/22/2017	Modified plug overmold		Description: CCable, 1830 mm, 2.5 mm 3C 90° 50-00400 audio plug to same, 28 AWG, 30-00177 wire	
					Size: Part number: A 10-02130
					Scale: 1:1 Sheet 1 of 1