


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00574	Connector, USB A 2.0 Plug, molding style, 180°, nickel plated shell, black insulator	1	
2	50-00576	Connector, USB A 2.0 receptacle, molding style, 180°, nickel plated shell, black insulator	1	
3	30-00872	Wire, 4C, 1PR 28 AWG, 2C 26 AWG, UL2725, 30V, 80C, 4.3 mm, shielded, VW-1, PVC, 79A, USB 2.0	1	
4	24-00210	Overmold, plug, USB A, slim design for aluminum shell	1	PVC, black
5	24-00217	Overmold, jack, USB A, slim design for aluminum shell	1	PVC, black
6	55-00073	USB A plug aluminum shell, 13x13.5x5.9 mm	1	black
7	55-00074	USB A jack aluminum shell, 14.7x7.2x22.5 mm	1	black

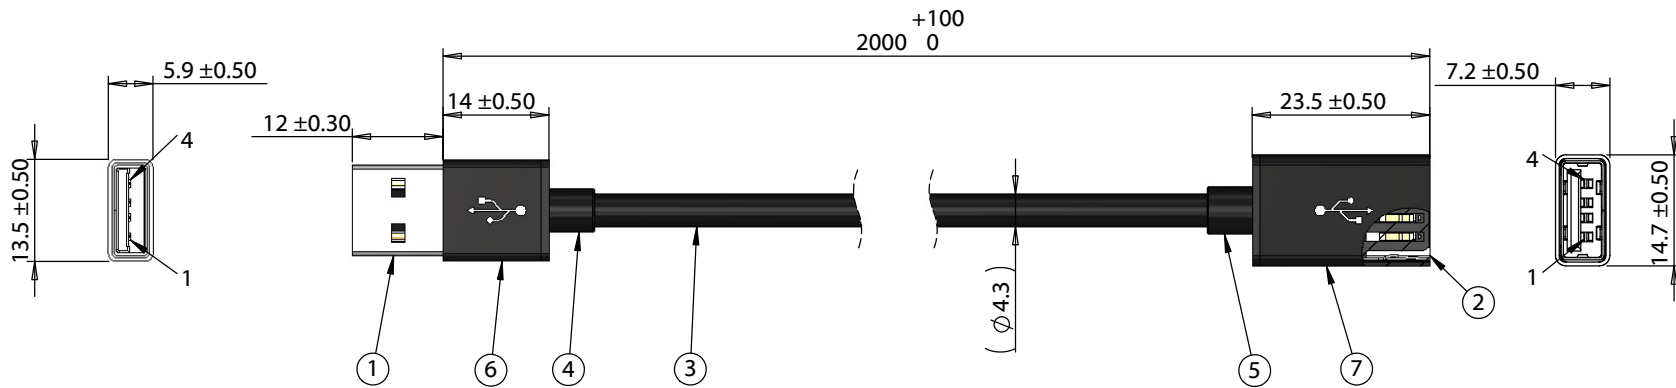

Wiring diagram		
50-00574	Wire Color	50-00576
1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Drain & Shield	Shell

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	1/5/2018	Initial release	AG <small>Digitally signed by AG Date: 2018.01.05 13:32:24 -0800</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	Size: Part number:
			PS <small>Digitally signed by PS Date: 2018.01.19 15:30:47 -0800</small>	Description:	A 10-02329
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 2000 mm, 50-00574 USB A plug to 50-00576 USB A receptacle, 26/28 AWG, 30-00872 wire	Scale: 1:1
					Sheet 1 of 1

5

4

3

2

1