

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5011902017](#)
Status: **Active**
Overview: Pico-Clasp Wire-to-Board Connectors
Description: 1.00mm Pitch, Pico-Clasp PCB Header, Dual Row, Vertical, Surface Mount, 0.10µm Gold Plated, Inner Positive Lock, 20 Circuits, Natural

Documents:

2D Drawing (DXF)	Product Specification 5011891000-PS-001 (PDF)
2D Drawing DXF (PDF)	Product Specification 5011891000-PS-JAP-001 (PDF)
3D Model	Application Specification 5011890000-AS-000 (PDF)
3D Model (PDF)	Packaging Specification SPK-501190-001-001 (PDF)
Drawing (PDF)	Datasheet (PDF)
Product Specification 5011890000-PS-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


UL E29179

General

Product Family	PCB Headers
Series	501190
Application	Signal, Wire-to-Board
Comments	With Pick-and-Place Tape
Overview	Pico-Clasp Wire-to-Board Connectors
Product Name	Pico-Clasp
UPC	822348790203

Physical

Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Nylon
Net Weight	315.600/mg
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.00mm
Plating min - Mating	0.102µm
Plating min - Termination	0.102µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Vacuum Pick-Up Tape
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C

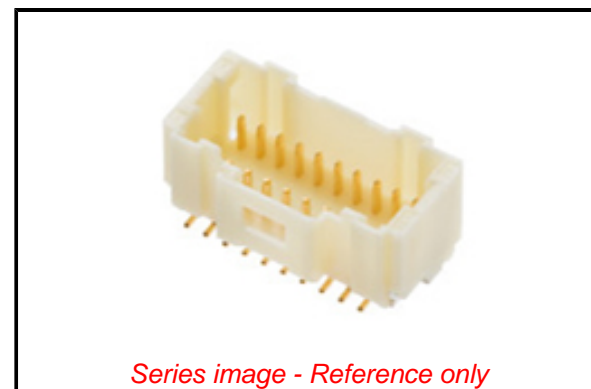

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[501190 Series](#)

Mates With

[501189 Pico-Clasp Wire-to-Board Female Housing](#)

Termination Interface: Style

Surface Mount

Electrical

Current - Maximum per Contact

1.0A

Voltage - Maximum

100V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification

5011890000-AS-000

Packaging Specification

SPK-501190-001-001

Product Specification

5011890000-PS-001, 5011891000-PS-001,

5011891000-PS-JAP-001

Sales Drawing

5011900000-SD-000

This document was generated on 07/26/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION