


PLUG-PLUG ADAPTER

R162.703.000

SERIES

N 75

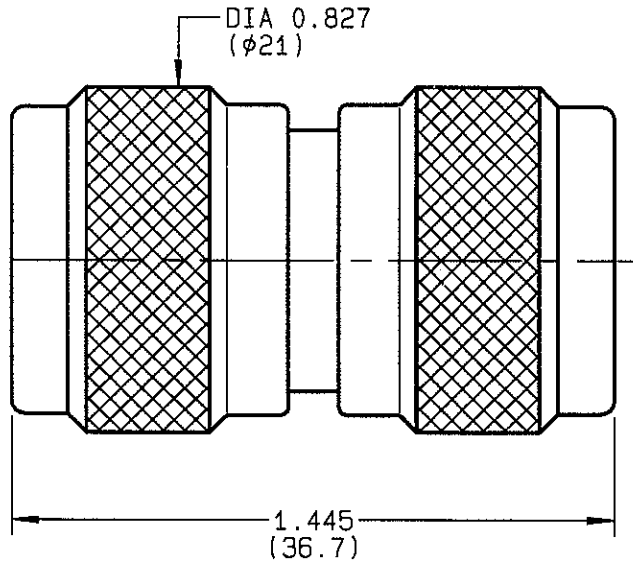

NOMINAL IMPEDANCE	75 Ω	CABLES :	
FREQUENCY RANGE	0-1.5 GHz		
TEMPERATURE RATING	-55/+155 °C		
V.S.W.R	1.06 + x F(GHz)Maxi		
RF INSERTION LOSS	0.15 \sqrt{F} (GHz) dB Maxi		
VOLTAGE RATING	1400 Veff Maxi	OTHERS CHARACTERISTICS	
DIELECTRIC WITHSTANDING VOLTAGE	2500 Veff Mini	CABLE RETENTION	NA N Mini
INSULATION RESISTANCE	5000 M Ω Mini	CENTER CONTACT RETENTION	
HERMETIC SEAL	NA Atm.cm ³ /s	Axial force - mating end	27 N Mini
LEAKAGE (pressurized only)	NA	Axial force - opposite end	27 N Mini
MECHANICAL DURABILITY	500 Cycles	Torque	NA cm.N Mini
WEIGHT	47.7 gr	RECOMMENDED TORQUES	
SPECIFICATION		Mating	130 cm.N
		Panel nut	NA cm.N
		Clamp nut	NA cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY	BRASS	BBR 2	
OUTER CONTACT	BRASS	BBR 2	
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET	SILICONE RUBBER	-	
OTHERS PIECES	BRASS	BBR 2	

ISSUE
9813M01

CREATION DATE
26-OCT-93

FILE PART-NUMBER
EPC 96-07



RADIALL®

BONDOM

The information given here is subject to change without notice.
Design changes may be in order to improve the product .

Connect to the future