

Flush Cutting Diagonal Pliers for Plastics

DIN ISO 5743

72

- > provides a fully flush cut when cutting tie-wraps, plastic and soft metals
- > for nearly flush cutting of molded plastic components from sprues
- > includes opening spring for easy repetitive work
- > vanadium electric steel; forged, oil-hardened

72 01 160


With elongated cutting edges; improved transmission ratio for 25% better cutting performance



72 01 160








72 02 125

72 11 160
 $\sphericalangle 45^\circ$ 



72 21 160
 $\sphericalangle 85^\circ$ 


| Product Number | Packaging | ↔ Inch mm | | Head | Handles | ⚖ lbs |
|----------------|-----------|-----------------|--|----------|-----------------------|----------|
| 72 01 140 | | 5 1/2 140 | | | | 0.28 |
| 72 01 160 | X | 6 1/4 160 |  | polished | plastic coated | 0.39 |
| 72 01 180 | | 7 1/4 180 | | | | 0.43 |
| 72 02 125 | | 5 125 |  | polished | multi-component grips | 0.24 |
| 72 11 160 | X | 6 1/4 160 | $\sphericalangle 45^\circ$  | polished | plastic coated | 0.38 |
| 72 21 160 | | 6 1/4 160 | $\sphericalangle 85^\circ$  | polished | plastic coated | 0.39 |

Diagonal Cutter for fiber optics

DIN ISO 5743

72


51

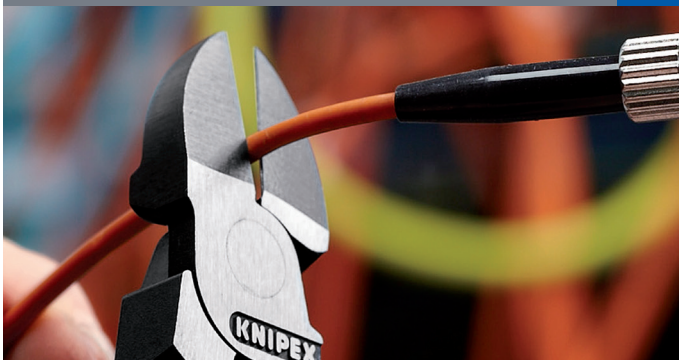

- > specially developed for cutting fiber optics (glass fiber cables)
- > with elongated cutting edges
- > cutting edges induction hardened
- > includes opening spring for easy repetitive work
- > vanadium steel; forged, multi stage oil-hardened



72 51 160


| Product Number | Packaging | ↔ Inch mm | | Head | Handles | ⚖ lbs |
|----------------|-----------|-----------------|---|----------|----------------|----------|
| 72 51 160 | | 6 1/4 160 |  | polished | plastic coated | 0.38 |