GlobTek, Inc.	Drawing Title: Power Din Plug, 3P, Snap and Lock, White, supplied in kit, ready to assemble				
www.globtek.com	Model No. High Power DC Connectors				
186 Veterans Drive,					
Northvale, NJ 07647		Rev A2			
Tel. (201) 784-1000	Part No./Ordering No. GTPWRDIN3LW	Rev A2			
Fax (201) 784-0111					

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at http://www.globtek.com/iso-certificates/

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions ( <a href="http://en.globtek.com/terms-and-conditions/">http://en.globtek.com/terms-and-conditions/</a>).

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

### Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

#### Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

**Customer Approval of Specification:** 

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc.	Drawing Title: Power Din Plug, 3P, Snap and Lock, White, supplied in kit, ready to assemble	
www.globtek.com Model No. High Power DC Connectors		
186 Veterans Drive,		
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. GTPWRDIN3LW	Rev A2
Fax (201) 784-0111		

## **REVISION HISTORY**


REV	DESCRIPTION	SUB	DATE	APPROVED
A2	Add a link to the assembly instructions P/N : PWRDINCONNECTOR_ASSEMBLY INSTRUCTIONS	QA	07/18/2022	QA
A1	Update the locking latch detail	QA	06/21/2020	QA
Α	Initial release	DR	05/28/2020	QA


#### AGENCY ONLINE DOCUMENTS

RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t3a000004GWEsAAO		
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf		
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf		
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf		

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

## Drawing:

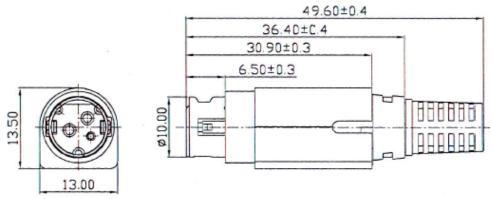



Locking Assembly detail: Standard and on this item: under different part #)

Electrical Specification:

# Pin1:1+2:7.5A max/54VDC Max, Pin3:1.0A max/54VDC

Optional cover upon request

Pin 1: Signal wire designed for AWG24 max wire Pin 2+3 contacts designed for AWG18 max wire

Insulation resistance ≥50MΩ 250VDC

Current /Voltage

PROPRIETARY INFORMATION

GlobTek, Inc.	Drawing Title: Power Din Plug, 3P, Snap and Lock, White, supplied in kit, ready to assemble		
www.globtek.com	www.globtek.com Model No. High Power DC Connectors		
186 Veterans Drive,			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. GTPWRDIN3LW	Rev A2	
Fax (201) 784-0111			

Contact resistance	≤30 mΩ
Withstand voltage (pin to pin)	250VAC / 1min
Lifetime	≥5000
Operation Temperature	-20°C- 50°C

Mechanical Specification: Body: ABS, UL 94HB Rated Insert: Nylon, UL 94V-2 Rated

Inner Shield: Copper Alloy, Nickel Plated

Contacts: Brass, Silver Plated Insertion Force: 4.5KG Max

Pull Force: 1.0-4.5KG unlocked, 4.5KG Min locked.

Durability: 5000 cycles

Color: GlobTek White, similar to RAL9003 "Signal White"

Each connector is packed in an individual bag

Mates with: KPJX-3S-S KPJXHT-3S-S KPJXHT-3S KMDGX-3S-AS KMDGX-3S-N KMDGX-3S-BS KPJX-PM-3S

KPJX-CM-3S KPJX-PM-3S-S KPJX-3S

Assembly instructions P/N: PWRDINCONNECTOR\_ASSEMBLY INSTRUCTIONS:

https://globtek.secure.force.com/spec/pdf/2320697/d2738500

GlobTek, Inc.	Drawing Title: Power Din Plug, 3P, Snap and Lock, White, supplied in kit, ready to assemble		
www.globtek.com			
186 Veterans Drive,			
Northvale, NJ 07647		Rev A2	
Tel. (201) 784-1000	Part No./Ordering No. GTPWRDIN3LW	Rev A2	
Fax (201) 784-0111			

PACKAGING		
Packing Spec P/N:		
Box Qty:	1000	
Gift Box Size (mm):		
Gift Box Color:	White	
Master Carton Size (mm):	TBD	
Master Carton Cubic Volume (m³):	0.00	
Master GW (Kg):	kg	
wt Ea. (Kg):	kg	
wt Ea. (Kg):	kg	
LABEL SPECS: ,		
PACK SPEC:		